



Extra wide Multi“talent“. vinylit **Multipaneel** wood texture

The vinylit Multipaneel with wood texture is an attractive alternative to wood and render. They are made of high-quality plastics in an environmentally friendly manner and finished with a UV-stable surface, which makes our facades particularly color-stable. While a classic wooden facade has to be repainted on a regular basis, the vinylit Multipaneel facade retains its appeal for many years. The facade profiles are available in assembly and transport-friendly lengths of 2.40 m.



10 YEARS OF
WARRANTY



ENERGY
EFFICIENCY




RECYCLED
PLASTIC



EASY TO
CLEAN



MADE IN
GERMANY

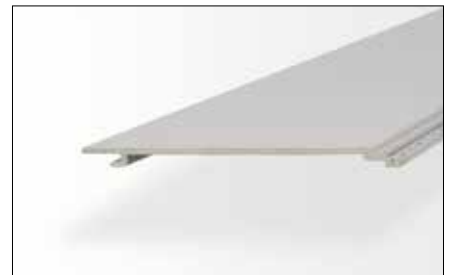

Our versatility is convincing.

The vinylit Multipaneel impresses with its even surface in brushed wood structure and its variety of colours. It is durable, easy to clean and extremely resistant.

Technical data

| | | |
|-------------------------------------|-------------------------------|---|
| Profile width | 285 mm | |
| Coverage width | 250 mm | |
| Thickness | 18 mm | |
| Length with vertical joint | 2400 mm | |
| Length without vertical joint | 6000 mm | |
| Weight | approx. 5,3 kg/m ² | |
| Density profile | 0,5 g/cm ³ | DIN EN ISO 845 |
| Density facing | 1,5 g/cm ³ | DIN EN ISO 1183-2 |
| Coefficient of linear extension | approx. 0,06 mm/mK | ISO 11359-2 |
| Modulus of elasticity | 1140 MPa | DIN EN ISO 527-2 |
| Tensile strength | 15,9 MPa | DIN EN ISO 527-2 |
| Elongation at break | 33 % | DIN EN ISO 527-2 |
| Flexural modulus | 1490 MPa | DIN EN ISO 178 |
| Flexural strength | 30,7 MPa | DIN EN ISO 178 |
| Bending strain at flexural strength | 4,0 % | DIN EN ISO 178 |
| Impact strength code | 23,10 | DIN EN 13245-2 |
| Fire behaviour | Class E | DIN EN 13501-1 <small>(= construction material class B2 acc. to DIN 4102-1, normal inflammability)</small> |




Assembly

| | |
|-------------------|----------------------------------|
| Installation | ordinarily, on wood substructure |
| Tools | Woodworking tools |
| Mounting distance | max. 400 mm |

Characteristics

| | |
|-------------------|--|
| Care instructions | Cleaning with commercially available cleaners. No scouring agents. Further care is not necessary. |
|-------------------|--|

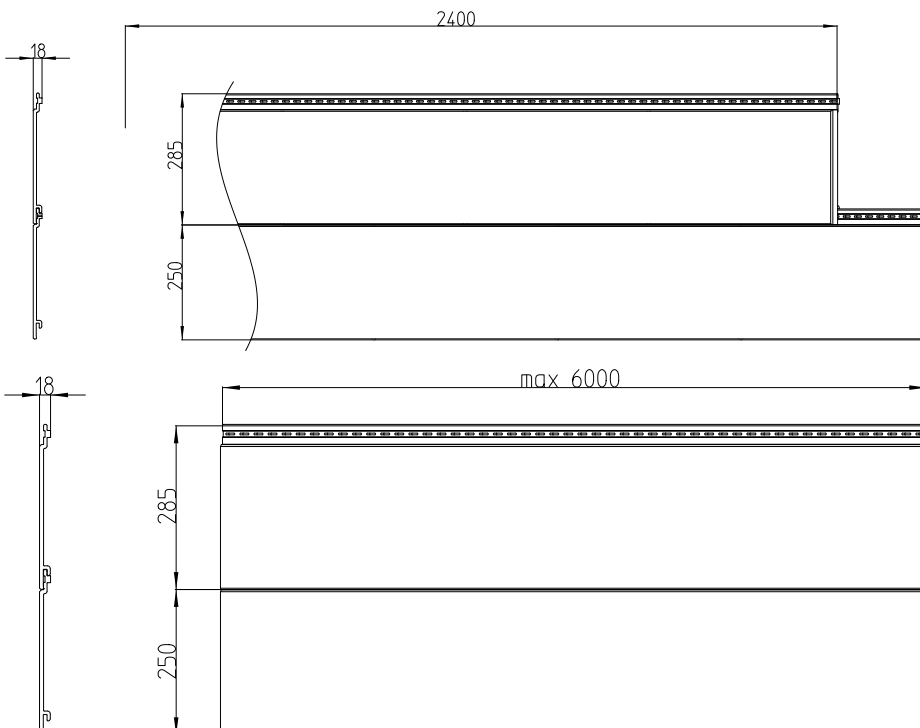

vinylit Multipaneel 2400:
vertical connection without integrated joint

