



## vinylTop wood texture

vinylTop facade profiles made of high-quality plastics are UV-resistant and durable, resistant to decay and insect infestation. The profiles are usually installed horizontally. Profile contour and the embossed surface correspond to a traditional wooden shiplap structure. vinylTop is the economical solution for the cladding of house walls, garages and garden sheds. Thanks to the low weight, they are particularly suitable for an installation in locations that are difficult to access. With appropriated substructure, they are suitable for ventilated facades.



10 YEARS OF  
WARRANTY



ENERGY  
EFFICIENCY




RECYCLED  
PLASTIC



EASY TO  
CLEAN



MADE IN  
GERMANY

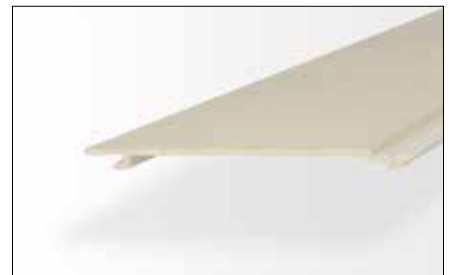

### Sustainability from one source.

Facade profiles, complete and color matching accessories and fixings.  
Vinylit facade systems can be completely recycled. This is sustainability!

## Technical data

Profile width	196 mm	
Coverage width	167 mm	
Thickness	18 mm	
Length	6000 + 10 mm	
Weight	approx. 3,8 kg/m <sup>2</sup>	
Density profile	0,5 g/cm <sup>3</sup>	DIN EN ISO 845
Density facing	1,5 g/cm <sup>3</sup>	
Coefficient of linear extension	approx. 0,06 mm/mK	ISO 11359-2
Impact strength code	{23,10}	DIN EN 13245-2
Fire behaviour	Class E	DIN EN 13501-1 <small>(= construction material class B2 acc. to DIN 4102-1, normal inflammability)</small>

## Assembly

Installation	ordinarily, horizontally on wood substructure
Tools	Woodworking tools
Mounting distance	max. 400 mm

## Characteristics

Care instructions	Cleaning with commercially available cleaners. No scouring agents. Further care is not necessary.
-------------------	--

